

nyloflex[®] FHC

Hard plate for standard applications in corrugated postprint


High plate hardness for reliable print quality

- suitable for a broad range of substrates
- very good and consistent ink transfer with excellent area coverage
- high solid density and minimum dot gain in the halftones
- intermediate depths with excellent contour definition

Efficient handling and superior durability

- convenient plate processing with short exposure times
- high print run stability due to superior resistance against mechanical stress
- long lifetime due to robust and durable material
- reduced cleaning cycles due to special surface properties

Schematic of nyloflex[®] FHC

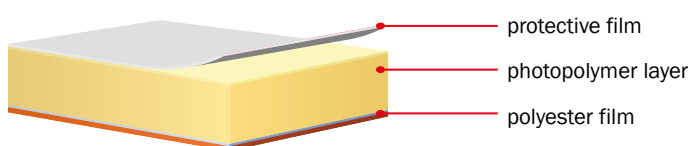

The nyloflex[®] FHC is a monolayer plate. It consists of a light sensitive photopolymer layer bonded to a polyester film.

nyloflex® FHC	
394	
Technical characteristics	
Base material	polyester film
Colour of raw plate	orange
Total thickness ¹ (mm) (inch)	3.94 (0.155")
Hardness acc. to DIN 53505 (Shore A)	40
Plate hardness (Shore A)	41
Relief depth (mm)	1.0 – 1.5
Tonal range (%) at screen ruling (l/cm)	3 – 90 48
Fine line width (down to µm)	300
Isolated dot diameter (down to µm)	750

Processing parameters ²	
Back exposure (s)	50 – 100
Main exposure (min)	8 – 18
Washout speed (mm/min)	70 – 100
Drying time at 60° C / 140° F (h)	3
Post exposure UV-A (min)	10
Light finishing UV-C (min)	10 – 15

¹ Standard thicknesses currently available – subject to change.

² All processing parameters depend on, among others, the processing equipment, lamp age and the type of washout solvent. The above mentioned processing times were established under optimum conditions on nyloflex® processing equipment and using nylosolv® washout solvents. Under other conditions the processing times can differ from these. Therefore the above mentioned values are only to be used as a guide.

Suitable equipment

The nyloflex® FHC can be processed with nyloflex® processing equipment and all similar devices.

Printing inks

Suitable for all water based and alcohol based printing inks.
(ethyl acetate content preferably below 15%, ketone content preferably below 5%)

Washout solvents

Especially good results are achieved with nylosolv® washout solvents.
nylosolv® can be distilled and reused.

Processing information

A detailed description of the individual platemaking steps, as well as detailed information about processing and storing can be found in the nyloflex® User Guide.

High quality standard

nyloflex® printing plates are manufactured according to DIN ISO 9001 and DIN ISO 14001 standards and requirements. This process guarantees our customers consistent high quality products and services.

You are welcome to contact us for further information.

Flint Group Flexographic Products
Sieglestrasse 25
70469 Stuttgart
Germany

T +49 711 9816-541
F +49 711 9816-801
info.flexo@flintgrp.com
www.flintgrp.com

All information in this document is based on our present knowledge and experience at the time of printing. Due to the multitude of factors influencing the processing and application of our products, it does not exempt the user from testing and calibrating. Nor does it imply any legally binding assurance concerning specific properties of the products or the suitability for a particular application. The responsibility of observing any possible industrial property rights, laws and regulations is the obligation of the user. Subject to technical changes without prior notice. Names marked ® are registered trademarks of Flint Group.

Get the app!

