


nyloflex[®] FCC

The durable standard in postprint

Product features

- Especially for printing on coarse corrugated fluted board, with uncoated and half coated papers
- Ideal for retail packages with simple designs
- Optimised for use in inline corrugated print production
- Very good ink transfer with excellent area coverage and high solid density
- Perfect adaptation to corrugated board surfaces reduces washboard effect
- Less plate cleaning due to special surface properties
- Extremely robust and durable material thus
 - high print run stability
 - excellent storage capability
 - low swelling characteristic
 - high resistance to ozone

Schematic of nyloflex[®] FCC

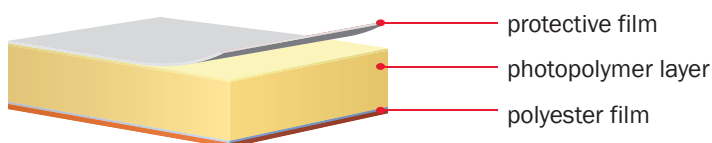

The nyloflex[®] FCC is a monolayer plate. It consists of a light sensitive photopolymer layer bonded to a polyester film.

	nyloflex® FCC					
	394	470	500	550	600	635
Technical characteristics						
Base material	polyester film					
Colour of raw plate	orange					
Total thickness¹ (mm)	3.94	4.70	5.00	5.50	6.00	6.35
(inch)	0.155	0.185	0.197	0.217	0.236	0.250
Hardness acc. to DIN 53505 (Shore A)	30	30	30	30	30	30
Plate hardness (Shore A)	33	32	31	30	30	30
Relief depth (mm)	1.0 – 1.5	1.2 – 2.2	1.8 – 2.8	2.0 – 3.0	2.2 – 3.0	2.2 – 3.0
Tonal range (%)	3 – 95	3 – 95	3 – 95	3 – 95	3 – 95	3 – 95
at screen ruling	32 l/cm (80 lpi)	24 l/cm (60 lpi)	24 l/cm (60 lpi)	24 l/cm (60 lpi)	24 l/cm (60 lpi)	24 l/cm (60 lpi)
Fine line width (down to µm)	300	300	300	300	300	300
Isolated dot diameter (down to µm)	750	750	750	750	750	1000

Processing parameters²						
Back exposure (s)	50 – 70	30 – 50	50 – 70	80 – 120	100 – 140	250 – 300
Main exposure (min)	8 – 18	8 – 18	8 – 18	8 – 18	8 – 18	8 – 18
Washout speed (mm/min)	90 – 100	60 – 70	60 – 70	60 – 70	60 – 70	60 – 70
Drying time at 60 °C / 140 °F (h)	3.0	4.0	4.0	4.0	4.0	4.0
Post exposure UV-A (min)	10	10	10	10	10	10
Light finishing UV-C (min)	8 – 12	8 – 12	8 – 12	8 – 12	8 – 12	8 – 12

¹ Standard thicknesses currently available – subject to change.

² All processing parameters depend on, among others, the processing equipment, lamp age and the type of washout solvent. The above mentioned processing times were established under optimum conditions on nyloflex® processing equipment and using nylosolv® washout solvents. Under other conditions the processing times can differ from these. Therefore the above mentioned values are only to be used as a guide.

Suitable equipment

The nyloflex® FCC can be processed with nyloflex® processing equipment and all similar devices.

Printing inks

Suitable for all water based and alcohol based printing inks.
(ethyl acetate content preferably below 15%, ketone content preferably below 5%)

Washout solvents

Especially good results are achieved with nylosolv® washout solvents.
nylosolv® can be distilled and reused.

Processing information

A detailed description of the individual platemaking steps, as well as detailed information about processing and storing can be found in the nyloflex® User Guide.

High quality standard

nyloflex® printing plates are manufactured according to DIN ISO 9001 and DIN ISO 14001 standards and requirements. This process guarantees our customers consistent high quality products and services.

You are welcome to contact us for further information.

Flint Group Flexographic Products
Sieglerstrasse 25
70469 Stuttgart
Germany

T +49 711 9816-541
F +49 711 9816-801
info.flexo@flintgrp.com
www.flintgrp.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Flint Group's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted. Product names followed by ® are trademarks registered by Flint Group (represented by Flint Group US LLC or Flint Group Germany GmbH)

Get the app!

