



# rotec<sup>®</sup> ULW Bridge

Ultra lightweight adapter for considerable weight savings in press and mounter applications

Available in wall thicknesses from 30 mm to 100 mm - Special sizes available on request

## Product Advantages

- Up to 65% reduction in weight
- Significant weight reduction for improved health and safety
- High quality printing in press applications
- Highest dimensional stability with constant outer diameter
- Easier handling


## Product Features

- Extremely durable, scratch and solvent resistant polyurethane surface (75 Shore D)
- Proven rotec<sup>®</sup> interior design of synthetic resin and fibre compound assures long-lasting and consistent mounting characteristics
- Aluminium end plates or end rings available as add-ons
- Available with rotec<sup>®</sup> Ω-Technology\* to provide electrical conductivity through the inner base, top layer and end plate
- rotec<sup>®</sup> Unifit and Airo configurations available
- High-precision grinding (TIR ≤ 0.02 mm) measured on carrier cylinder at TIR ≤ 0.005 mm

Manufactured in Germany and USA

\* The regulations of ATEX EU Directive No. 2014/34/EU (formerly ATEX 95) concerning electrostatic derivation ability are fulfilled.

## Weight Comparison

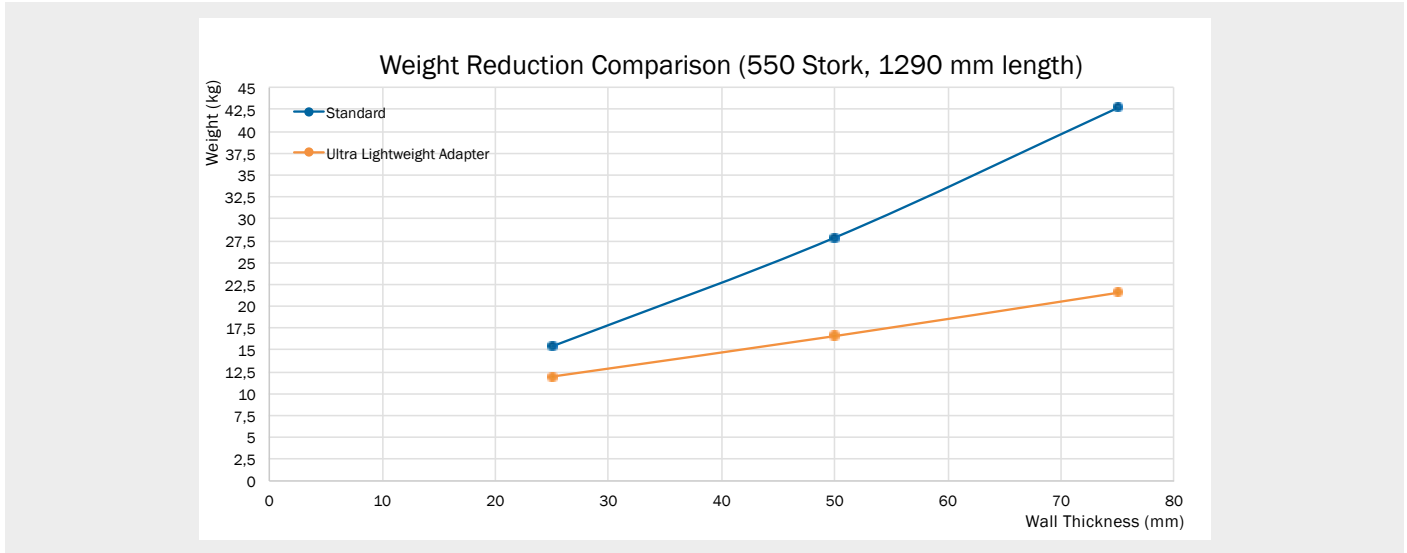

## Product Specifications

<b>Field of Application</b>	<b>Mid-web, Wide-web, Pre-print, Pre-press</b>
<b>Wall Thickness</b>	<b>From 30 mm to 100 mm (special sizes available on request)</b>
<b>Face Length</b>	<b>From 800 mm to 2000 mm (special sizes available on request)</b>
<b>Tolerances</b>	<b>High-precision grinding (TIR ≤ 0.02 mm) (measured on carrier cylinder at TIR ≤ 0.005 mm)</b>

Please contact our Customer Service for additional information.

**Flint Group**  
Solmsstraße 83  
48683 Ahaus  
Germany

T +49 2561 9826 801  
F +49 2561 9826 789  
info.flexo@flintgrp.com  
www.flintgrp.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Flint Group's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted. Product names followed by ® are trademarks registered by Flint Group (represented by Flint Group US LLC or Flint Group Germany GmbH)