



# rotec<sup>®</sup> Smart Sleeve

Sleeve with optimised, new generation PU technology  
for conventional plate mounting

Available wall thicknesses from 12 mm to 100 mm – Special sizes available upon request

## Product Advantages

- **Weight-optimised** with up to 25% reduced weight compared to similar products
- Newly developed **easy-mount technology**
- Possibility of **faster press speeds** while maintaining excellent, high definition print quality
- Specialised sleeve construction for **reduced vibration**

## Product Features


- Advanced polyurethane materials and new optimised sleeve design
- Proven, extremely durable polyurethane surface (75 Shore D) – Scratch and solvent resistant
- High-precision grinding (TIR ≤ 0.02 mm) measured on carrier cylinder at TIR ≤ 0.005 mm
- Tolerance of face length according to DIN ISO 2768 T1 c
- Available in a conductive version with rotec<sup>®</sup> Ω Technology\*

Manufactured in Germany and USA

\* The regulations of ATEX EU Directive No. 2014/34/EU (formerly ATEX 95) concerning electrostatic derivation ability are fulfilled.

# rotec® Smart Sleeve

## New Generation Sleeve Construction

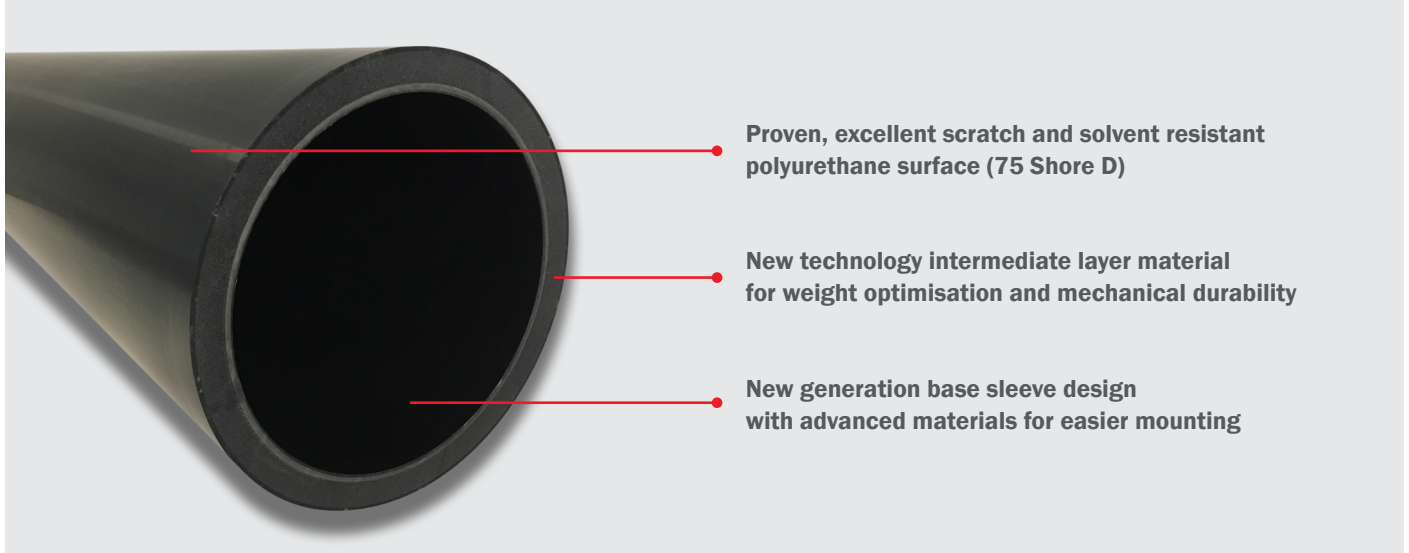

## Product Specifications

<b>Field of Application</b>	<b>Mid-web, Wide-web, Pre-print</b>
<b>Wall Thickness</b>	<b>From 12 mm to 100 mm (additional sizes available on request)</b>
<b>Face Length</b>	<b>From 400 mm to 2400 mm (additional sizes available on request)</b>
<b>Tolerances</b>	<b>TIR (total indicated runout) <math>\leq 0.02</math> mm (measured on air-cylinder with TIR <math>\leq 0.005</math> mm) Face length tolerance as per DIN ISO 2768 T1 c</b>
<b>Handling</b>	<b>Newly developed easy-mount technology Scratch and solvent resistant surface</b>

Please contact Customer Service for additional information.

**Flint Group**  
Solmsstraße 83  
48683 Ahaus  
Germany

T +49 2561 9826 801  
F +49 2561 9826 789  
info.flexo@flintgrp.com  
www.flintgrp.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Flint Group's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted. Product names followed by ® are trademarks registered by Flint Group (represented by Flint Group US LLC or Flint Group Germany GmbH). Rely on us<sup>SM</sup> is a service mark of Flint Group.